

'Light' proving tanks

5-10-20 liters



'Light' model proving tanks are used for calibration of p.d. meters, as well as dosing pumps, tanks and fuel dispensers.

Standard

These proving tanks conform to OIML R120 International Recommendation.

Tolerance of measurement is as follows:

5L	————>	±5mL	} Conform to OIML R120
10L	————>	±5mL	
20L	————>	±10mL	

Reading scale partition and rang


5L	————>	±5mL / ±30mL
10L	————>	±5mL / ±50mL
20L	————>	±10mL / ±200mL

Upon request: the proving tank can be supplied with calibration certificate recognized by EA (for Europe) and ILAC-MRA (International Certificate).

Wooden case available upon request.

Technical data

CAPACITY	DIMENSIONS (mm)			WEIGHT (KG)
	A	B	C	
5 LITERS	210	48	320	2,5
10 LITERS	210	48	490	3,5
20 LITERS	262	67	695	6,3

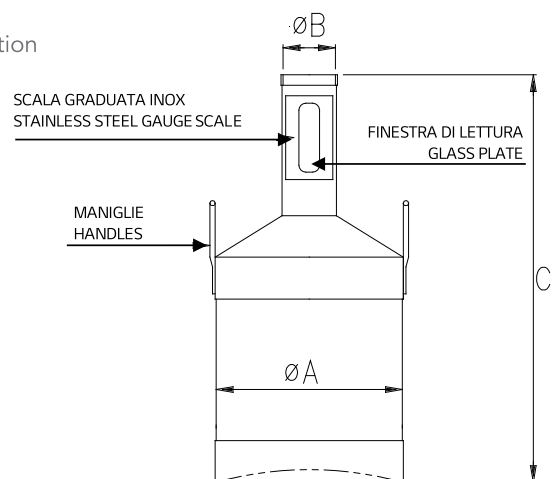

Construction

Body:	AISI 304
Reading scale:	plexiglass, on the neck of the proving tank
Gauge plate:	AISI 304, adjustable for calibration and fixed on the neck with sealed screws
Cap:	rubber