

Separator Element

60 MIL-Type



FILTER ELEMENTS

Qualified to specification EI 1581 6th Edition, Category M

Separator elements are used as the second stage of a high-performance separation in filter/water separators. After emergence from the coalescer, aviation fuels pass through the pores of the separator element while water droplets are repelled by the hydrophobic separator surface. Water droplets settle into the filter/water separator sump to be drained off.

60 MIL-Type separator elements are fitted with a Teflon®-coated screen. Separator elements with a Teflon®-coated screen can be reused after a cleaning during coalescer element changeouts. Small areas of damage can be repaired.

Application Areas

- Mobile and stationary refuelling equipment
- Tank farms
- Ships and loading terminals
- Refineries

Technical Data


- | | |
|--------------------------|--|
| • Flow direction: | Out-to-in |
| • Service time (max.): | 120 months ¹⁾²⁾ |
| • Storage time (max.): | 60 months ³⁾ |
| • Operating temperature: | Min. -30°C (-22°F) / Max. 80°C (176°F) |

1) Separator with a Teflon® coated screen

2) Manufacturer recommendation


3) Manufacturer recommendation: 20°C and max. 50% humidity after date of shipment out of stock of GmbH

Element Code

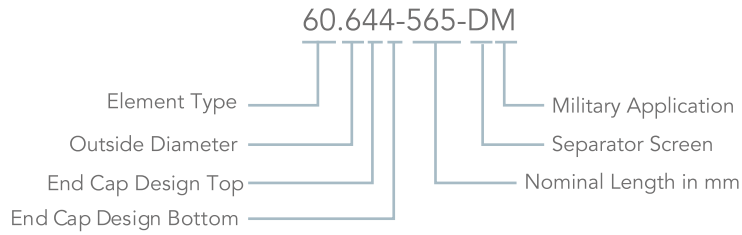

Material: Center Tube & End Cap Design

- Polyamid
- Epoxy Coated Steel
- Stainless Steel

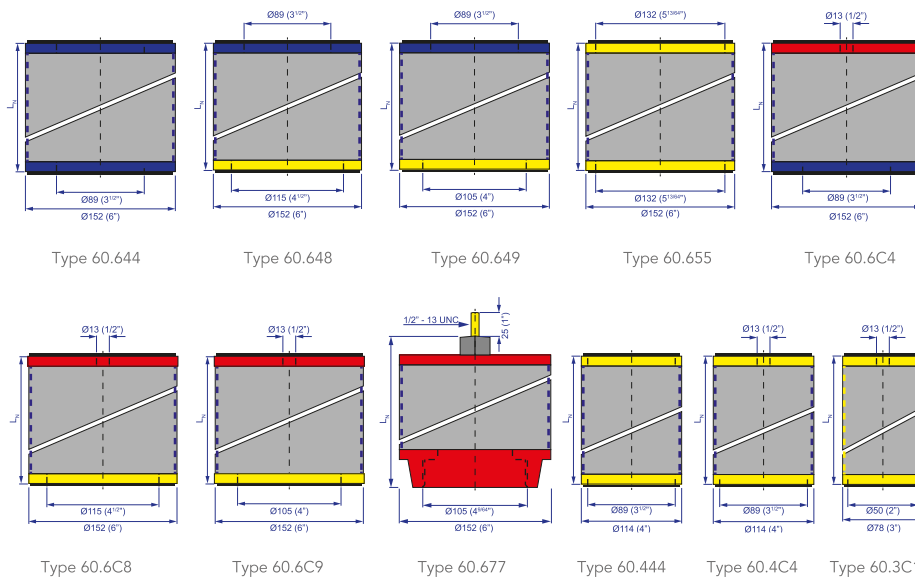

Element Selection

Type	Outside diameter	End Cap Design Top	End Cap Design Bottom	Separator Screen
60.	3 Ø 3" (78 mm)	4 Inner Ø 89 mm	1 Inner Ø 50 mm	DM Teflon ® coated stainless steel screen
60.	4 Ø 4" (114 mm)	5 Inner Ø 132 mm	3 Inner Ø 40,5 mm	DMV Teflon ® coated stainless steel screen, Variable hole pattern
60.	6 Ø 6" (152 mm)	7 Closed (with tread bolt 1/2"UNC)	4 Inner Ø 89 mm	
		C Closed (with 13 mm hole)	5 Inner Ø 132 mm	
			7 Screw / thread bolt	
			8 Inner Ø 115 mm	
			9 Inner Ø 105 mm	

Nominal Length in mm								
179	235	279	300	362	407	430	526	565
600	626	700	727	754	756	820	842	900
965	1012	1093	1130	1188	1204	1226	1244	1290
1422								